



PFAS Removal from a Soil Stockpile Using Thermal Conduction Heating

Eielson Air Force Base, Alaska



Operational Goals

- Achieve average stockpile temperatures above 350° Celsius
- Maintain temperatures for at least two weeks

Site Characteristics


- Pilot study: 134 cubic yard stockpile
- Insulation cover used to shield soil pile from inclement weather
- Temperatures at the site reached as low as -39°C

Operations

- Total run time: 91 days
- 48 heaters and nine soil vapor extraction points

Results

- Stockpile temperatures:
 - maximum 481°C
 - average 414 °C
- Soil sample analysis underway

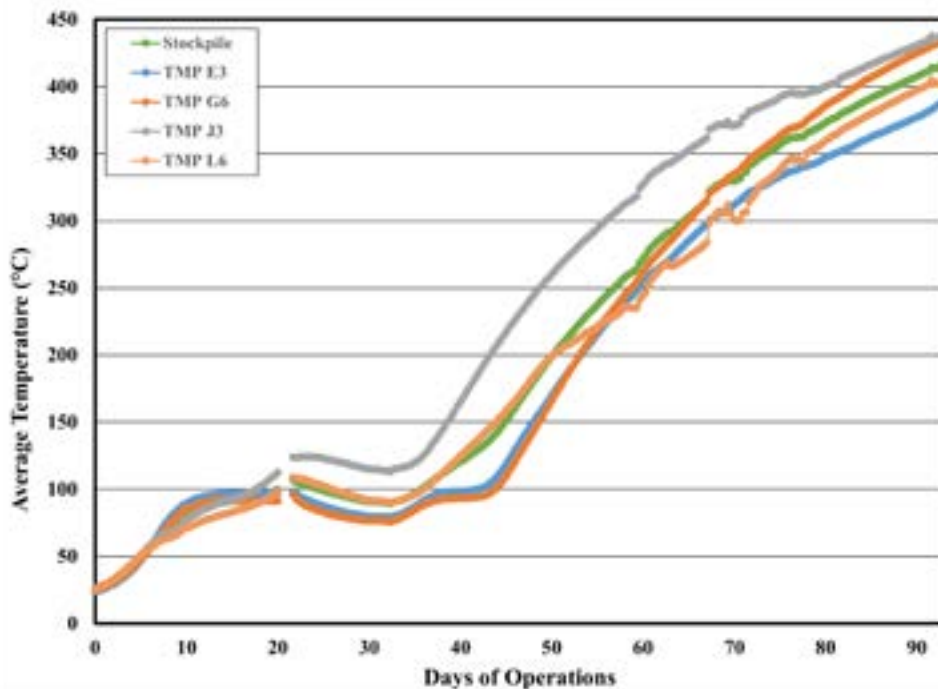

**Safe. Fast. Certain.
Guaranteed.**

100% Employee Owned

Contact TRS Group:
Mark Kluger
VP Sales & Marketing
302-655-6651

For more information and other project examples, please visit:
www.thermalrs.com